


Finishing other than special comment.	Unit : mm
Corner other than special comment.	Radius other than special comment.; R-By machining
Tolerance other than special comment.;	OAL ≤ 500mmL = +3 mm,-1mm OAL > 500mmL = +3%,-1%

Rev.	ECN No.	Revision note.	Date	Revised by
------	---------	----------------	------	------------

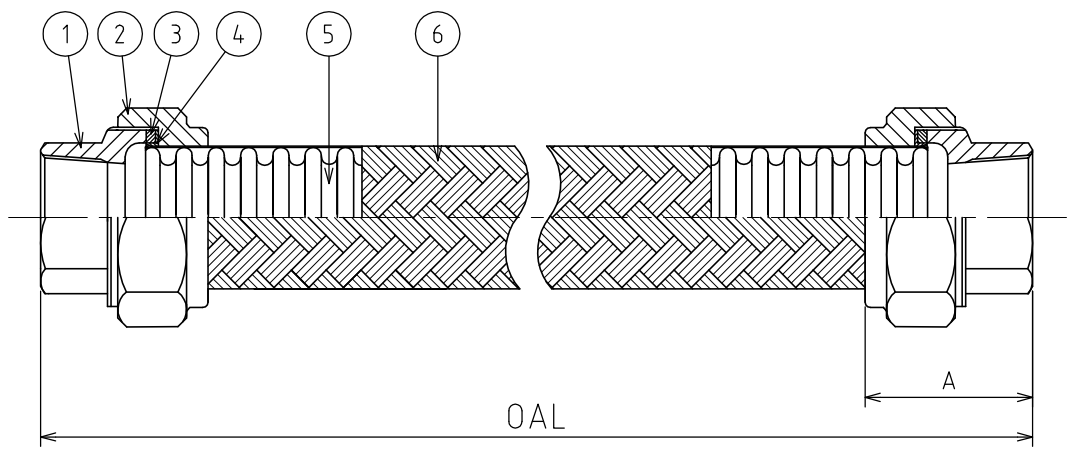

Max.Working Pressure : 25 bar
Max.Working Temperature : 200 Deg.C

SIZE mm(inch)	Thread Rc (Inch)	Min.Bending Radius(mm)	Overall Length			Ineffective Length Ax2 (mm)
			300 mm	400 mm	500 mm	
			Lateral Movement(mm)			
15A(1/2")	1/2"	200	43	85	138	70
20A(3/4")	3/4"	200	37	78	130	85
25A(1")	1"	200	36	75	127	90
32A(1-1/4")	1-1/4"	250	26	58	100	100
40A(1-1/2")	1-1/2"	250	24	54	95	110
50A(2")	2"	350	15	37	67	120

Item	Part Name	Material	Q'ty	Remark
6	WIRE BRAID	SUS304	1	
5	FLEXIBLE TUBE	SUS304	1	
4	UNION RING	SUS304	2	
3	GASKET	NON ASBESTOS	2	
2	UNION NUT	FCMB	2	
1	UNION END	FCMB	2	



Wellgrow Industrial Estate
Chachoengsao, Thailand
www.tozen.co.th

PROPRIETARY DATA
THIS DOCUMENT CONTAINS TOZEN INDUSTRIAL CO.,LTD.
CONFIDENTIAL AND PROPRIETARY INFORMATION AND CANNOT
BE USED,DUPLICATED OR DISCLOSED IN WHOLE OR IN PART
EXCEPT WITH EXPRESS WRITTEN PERMISSION OF
TOZEN INDUSTRIAL CO.,LTD.

Note : -Any information provided in drawing is subject to change without notice for error rectification or design modification.

DATE	DRAWN BY	CHECKED BY	APPROVED BY	TITLE	SF 100(SW)	Revision	Size		
	06/07/2018	Pratueng	Wuthipan	Somkisada	MTF-18-002-00	00	A4		
DATE	06/07/2018	06/07/2018	06/07/2018	MATERIAL	See in Table	SCALE : N.T.S	UNIT : mm	Method	