


Finishing other than special comment.	Unit : mm	
Corner other than special comment.	Radius other than special comment.; R-By machining	
Tolerance other than special comment.;	OAL ≤ 500mmL = +3 mm,-1mm OAL > 500mmL = +3%,-1%	

Rev.	ECN No.	Revision note.	Date	Revised by
------	---------	----------------	------	------------

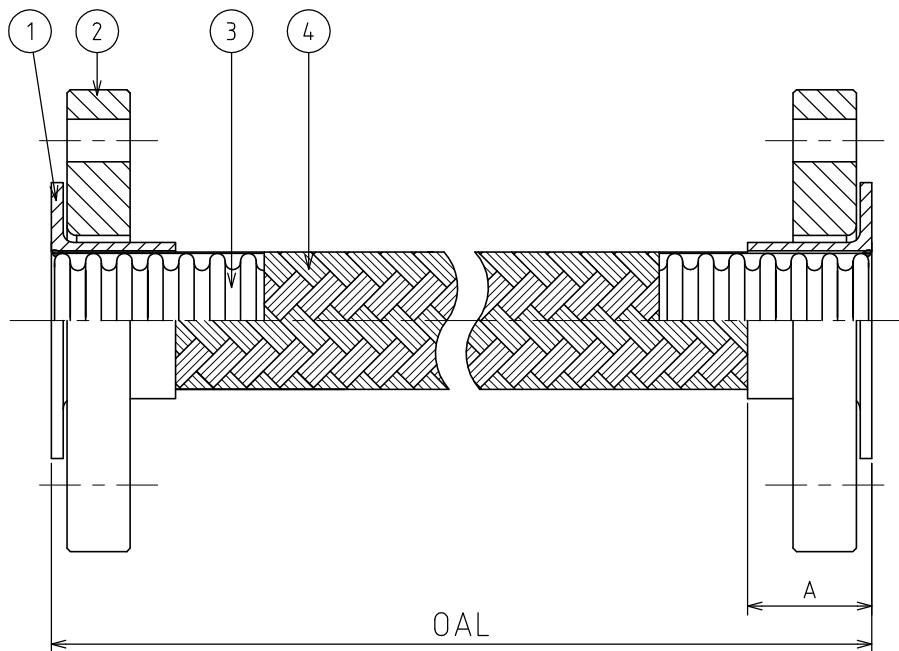

Max.Working Temperature : 250 Deg.C

SIZE mm(inch)	Min.Bending Radius(mm)	Overall Length			Ineffective Length Ax2 (mm)
		300 mm	400 mm	500 mm	
		Lateral Movement(mm)			
15A(1/2")	200	56	102	158	36
20A(3/4")	200	56	102	158	36
25A(1")	200	56	102	158	36
32A(1-1/4")	250	44	82	130	40
40A(1-1/2")	250	43	81	129	41
50A(2")	350	31	60	96	41
65A(2-1/2")	410	25	49	80	50
80A(3")	450	22	44	72	54
100A(4")	560	18	35	58	54

Note :-Working Pressure(w/p)
SF6700(SW) -Please refer to spiral & annular tube and fitting.
-Any information provided in drawing is subject to change
without notice for error rectification or design modification.

4	WIRE BRAID	SUS304	1	
3	FLEXIBLE TUBE	SUS304,SUS316L	1	
2	LOOSED FLANGE	SS400	2	ZINC-PLATED
1	LAP RING	SUS304	2	
Item	Part Name	Material	Q'ty	Remark



Wellgrow Industrial Estate
Chachoengsao, Thailand
www.tozen.co.th

PROPRIETARY DATA
THIS DOCUMENT CONTAINS TOZEN INDUSTRIAL CO.,LTD.
CONFIDENTIAL AND PROPRIETARY INFORMATION AND CANNOT
BE USED,DUPLICATED OR DISCLOSED IN WHOLE OR IN PART
EXCEPT WITH EXPRESS WRITTEN PERMISSION OF
TOZEN INDUSTRIAL CO.,LTD.

DATE	DRAWN BY	CHECKED BY	APPROVED BY	TITLE	SF 6700(SW)	Revision	Size		
	06/07/2018	Pratueng	Wuthipan	Somkisada	MTF-18-006-00	00	A4		
DATE	06/07/2018	06/07/2018	06/07/2018	MATERIAL	See in Table	SCALE : N.T.S	UNIT : mm	Method	