


Finishing other than special comment.	Unit : mm
Corner other than special comment.	Radius other than special comment.; R-By machining
Tolerance other than special comment.;	OAL ≤ 500mmL = +3 mm,-1mm OAL > 500mmL = +3%,-1%

Rev.	ECN No.	Revision note.	Date	Revised by
------	---------	----------------	------	------------

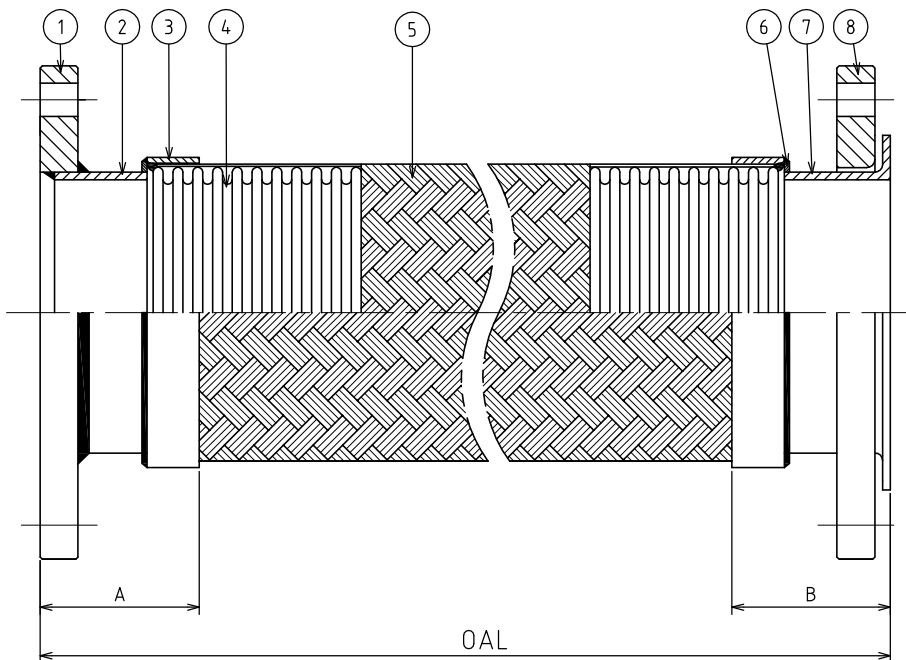

Max.Working Temperature : 250 Deg.C

SIZE mm(inch)	Min.Bending Radius(mm)	Overall Length			Ineffective Length AxB (mm)
		300 mm	400 mm	500 mm	
		Lateral Movement(mm)			
200A(8")	1015	1	5	13	220
250A(10")	1220	-	4	11	220
300A(12")	1420	-	4	9	220
350A(14")	2700	-	3	7	230
400A(16")	3300	-	3	6	230

Item	Part Name	Material	Q'ty	Remark
8	LOOSED FLANGE	SS400,SUS304	1	
7	LAP JOINT	SS400,SUS304	1	
6	BAND RING	SS400,SUS304	2	
5	WIRE BRAID	SUS304	1	
4	FLEXIBLE TUBE	SUS304,SUS316L	1	
3	COLLAR	SUS304	2	
2	SHORT PIPE	SS400,SUS304	1	
1	FIXED FLANGE	SS400,SUS304	1	

Note : -Working Pressure(w/p)
SF7800 -Limited of flange and hose rating.
-Any information provided in drawing is subject to change without notice for error rectification or design modification.



Wellgrow Industrial Estate
Chachoengsao, Thailand
www.tozen.co.th

PROPRIETARY DATA
THIS DOCUMENT CONTAINS TOZEN INDUSTRIAL CO.,LTD.
CONFIDENTIAL AND PROPRIETARY INFORMATION AND CANNOT
BE USED,DUPLICATED OR DISCLOSED IN WHOLE OR IN PART
EXCEPT WITH EXPRESS WRITTEN PERMISSION OF
TOZEN INDUSTRIAL CO.,LTD.

DATE	DRAWN BY	CHECKED BY	APPROVED BY	TITLE	SF 7800	Revision	Size
	06/07/2018	Pratueng	Wuthipan	Somkisada	MTF-18-010-00	00	A4
DATE	06/07/2018	06/07/2018	06/07/2018	MATERIAL	See in Table	SCALE : N.T.S	UNIT : mm
						Method	