


Finishing other than special comment.	Unit : mm
Corner other than special comment.	Radius other than special comment.; R-By machining
Tolerance other than special comment.:	
OAL ≤ 500mmL = +3 mm,-1mm	
OAL > 500mmL = +3%,-1%	

Rev.	ECN No.	Revision note.	Date	Revised by
------	---------	----------------	------	------------

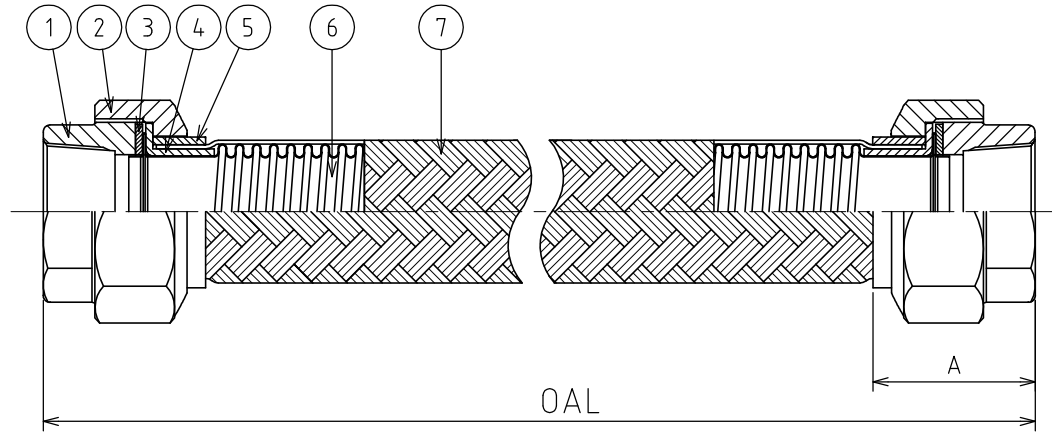

Max.Working Pressure : 16 bar
 Max.Working Temperature : 200 Deg.C

SIZE mm(inch)	Thread Rc (Inch)	Min.Bending Radius(mm)	Overall Length			Ineffective Length Ax2 (mm)
			300 mm	400 mm	500 mm	
			Lateral Movement(mm)			
15A(1/2")	1/2"	200	41	83	136	74
20A(3/4")	3/4"	200	41	83	136	74
25A(1")	1"	200	37	77	129	86
32A(1-1/4")	1-1/4"	250	28	60	103	94
40A(1-1/2")	1-1/2"	250	26	58	100	99
50A(2")	2"	350	17	39	70	110

7	WIRE BRAID	SUS304	1	
6	FLEXIBLE TUBE	SUS304/SUS316L	1	
5	COLLAR	SS400	2	
4	UNION RING	SS400	2	
3	GASKET	NON ASBESTOS	2	
2	UNION NUT	FCMB	2	
1	UNION END	FCMB	2	
Item	Part Name	Material	Q'ty	Remark

Note : -Any information provided in drawing is subject to change without notice for error rectification or design modification.



Wellgrow Industrial Estate
 Chachoengsao, Thailand
 www.tozen.co.th

PROPRIETARY DATA
 THIS DOCUMENT CONTAINS TOZEN INDUSTRIAL CO.,LTD.
 CONFIDENTIAL AND PROPRIETARY INFORMATION AND CANNOT
 BE USED,DUPLICATED OR DISCLOSED IN WHOLE OR IN PART
 EXCEPT WITH EXPRESS WRITTEN PERMISSION OF
 TOZEN INDUSTRIAL CO.,LTD.

DATE	06/07/2018	06/07/2018	06/07/2018	MATERIAL	See in Table	SCALE : N.T.S	UNIT : mm	Method		
	DRAWN BY	CHECKED BY	APPROVED BY	TITLE	SF 100(NW)				Revision	Size
	Pratueng	Wuthipan	Somkisada	DWG NO.	MTF-18-001-00				00	A4